



Bevelling machine

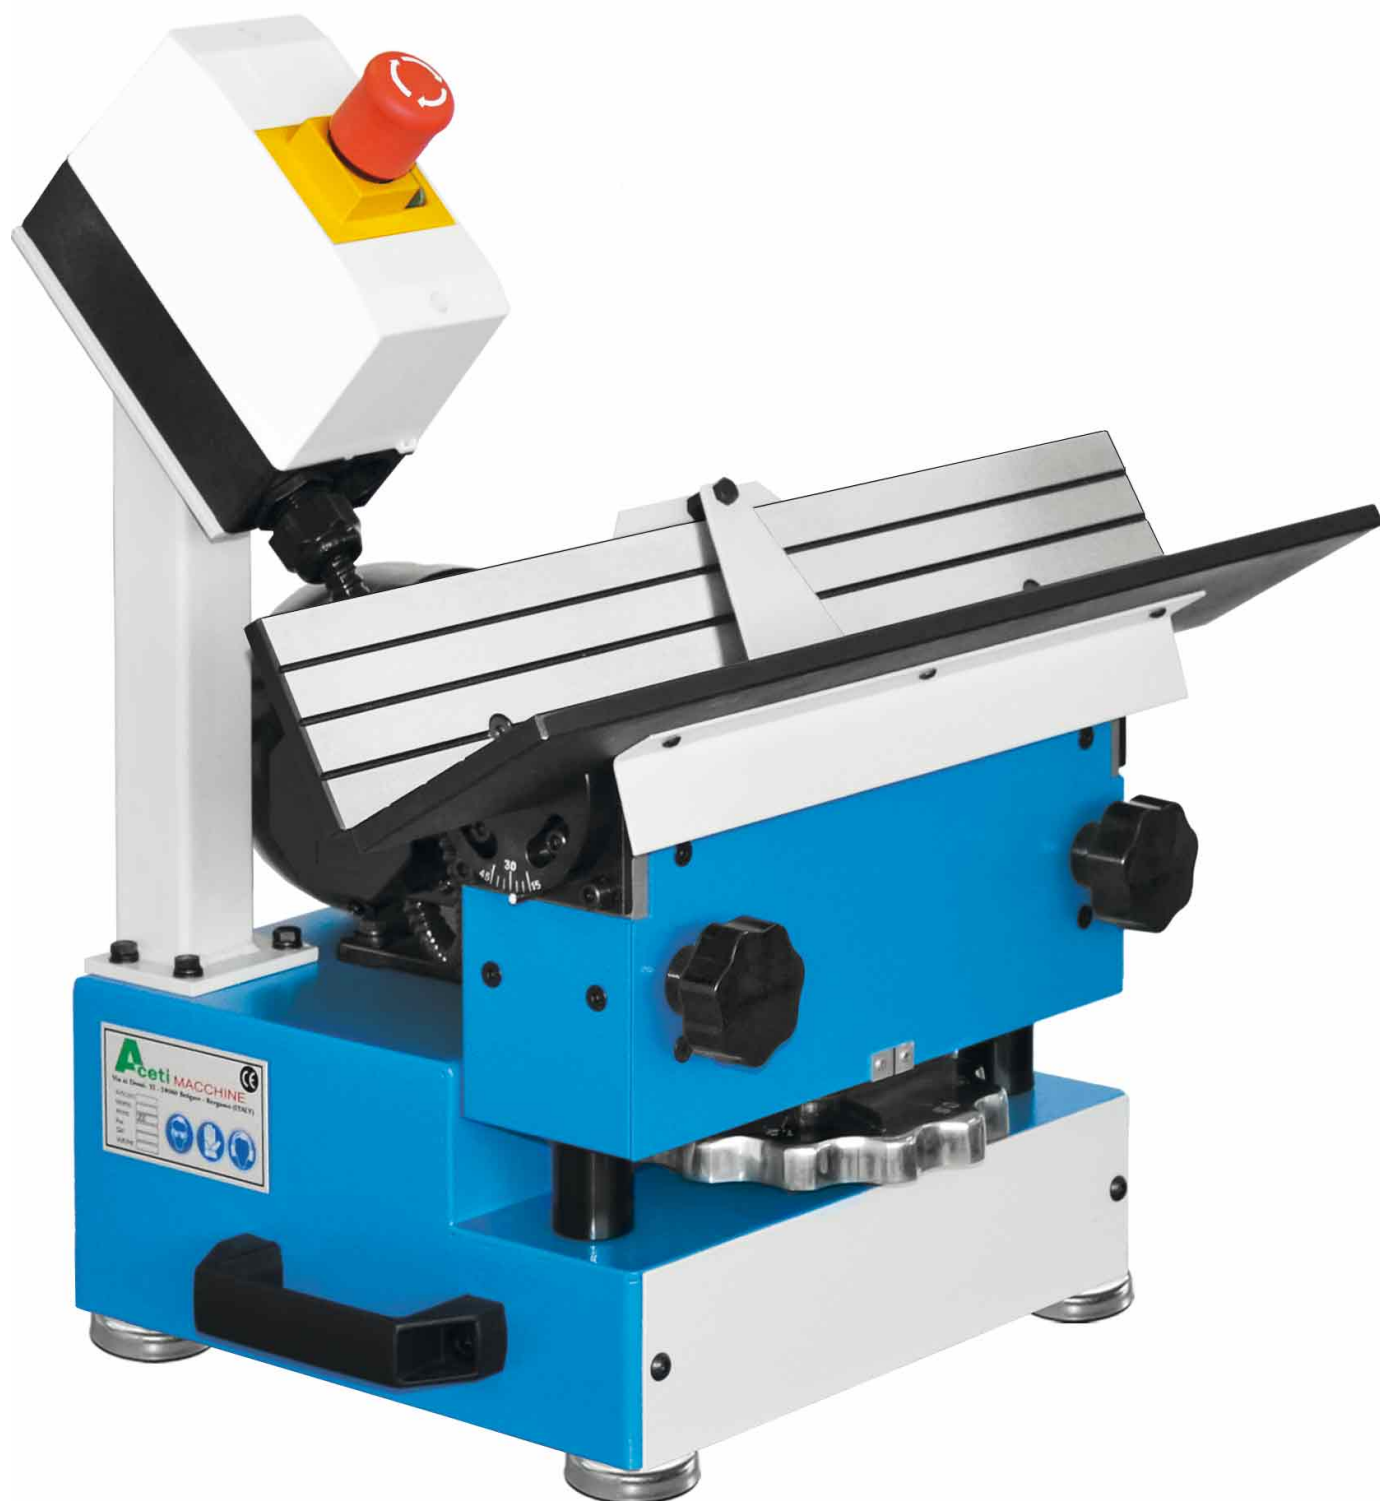

Made in Italy



ART. 61		SMUSSATRICE DA BANCO CHAMFERING MACHINE FOR DESK CHANFREINEUSE DE BANC KANTENFRÄSMASCHINE FÜR WERKBANK									
											
Volt 400 kW 1,1											
hp	Rpm	m/s	dB	E	F	G	G1	kg			
1,5	2800	12	68	400	500	500	245	32			
											
ISO SPUN 12.03.08											
Ø mm		Z		P	R	T	Sm	J°			
80		10		500	80	100	0+6	15°+45°			

General technical info

Power supply	400 50 3	Volt Hz Phase
Motor power	1,1 (1,5)	kW (hp)
Motor speed	2800	rpm
Acoustic emission	68	dB
Overall dimension (Width x Depth x Height)	500 x 400 x H. 500	mm
Weight standard machine	32	kg

• Chamfer - bevel unit

Bevel dimension (diagonal)	0 ÷ 6	mm
Bevel angle	15 ÷ 45	°
Milling cutter diameter	ø 80	mm
Quantity of widia insert milling cutter	10	No.
Widia insert type/code	SPUN 12 03 08	ISO
Support table dimension	100 x 500	mm
Peripheral speed	12	m/sec

Standard Equipments



Machine respect CE stamp of compliance

- Machine with CE conformity mark made respecting the requirements of the most recent directives concerning it.
- Machine complete with instruction manual complete with CE conformity certificate, test sheet and exploded view with relative spare parts list.
- Machine equipped with a set of service keys suitable for the adjustment and maintenance of the machine.



Guarantee of European standards

The stringent tests guarantee that all the requisites and standards necessary to obtain the guarantee in accordance with European standards are respected. Since the project we dedicate a lot of care and attention to making the machine with high quality level to deliver machines that last over time.

Base

Stable bench structure with anti-vibration rubbers at the base.

Electrical panel

Electric controls with emergency stop and anti-reset function for accidental starting and electronic overload protection.

Hardened guide coating

Rectified and grooved guides with hardening treatment for a prolonged friction resistance.

Axial movement

Axial displacement for full use of the cutting surface of the inserts.

Variable chamfer angle

Chamfering guide with index for bevels from 15 ° to 45 °.

Handwheel

Handwheel for chamfer dimension adjustment.

Miller body

Miller body complete with 10 tungsten carbide inserts.

Technical modification

This product data sheet does not constitute a contractual obligation.
We reserve the right to modify and/or improve our machines without prior notice.
Some photographs and illustrations are purely demonstrative and may differ from the real ones.